

WHEELS

FOR

AGRICULTURE TECHNIQUES

20
24



Catalog of products

Your reliable partner!


www.agrokar.com.ua

APPLICATION

➤➤➤ FARMFLEX WHEELS

SPECIALY DESIGNED

for intensive agricultural applications

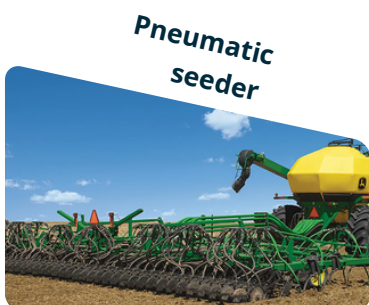

➤➤➤ SELF-CLEANING


Thanks to its design

Semi-pneumatic tires for maximum reliability

- Fully self-cleaning tire, thanks to the flexibility of natural rubber, forms, internal and external tire design
- The risk of a wheel puncture is eliminated, maintenance is not required

VERSATILITY:

Multiple forms of hardness are possible depending on the soil and climatic conditions of the application of technologies (ordinary, simplified, direct extrusion)

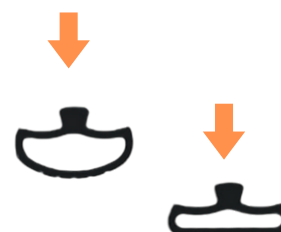


CONFIGURATION OF WHEELS

>>> METAL DISCS



Metal with bolt fastening with a spacer

MVE

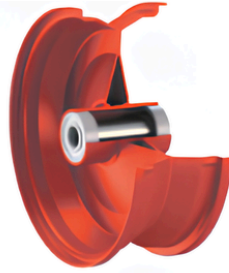

Metal monobloc

MM



Metal with bolt fastening

MV



Metal with bolt fastening with a spacer

MVVE



Metal with bolt fastening on spokes

MVV

>>> METAL-POLYMER DISKS



Metal-polymer with bolt fastening

MRV



Polymer on spokes with bolt fastening

RVV



Polymer with bolt fastening

RV


>>> POLYMER DISCS

HUB CONFIGURATION


Supplied without bearing



Without hub

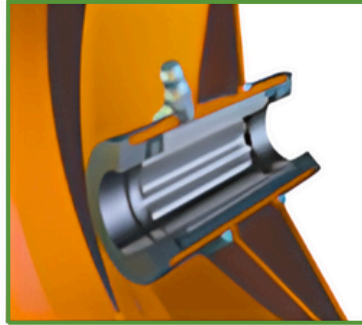


Single row ball bearing

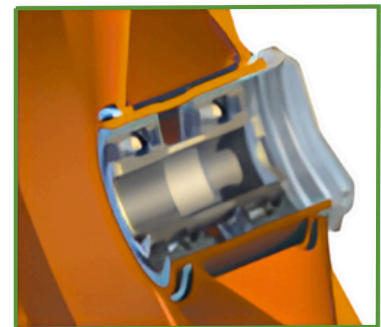


Needle bearing inner race and nylon bushings




Monobloc single row ball bearing

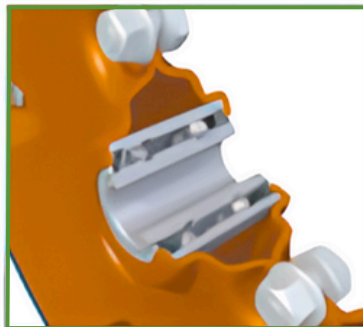

two nylon bushings

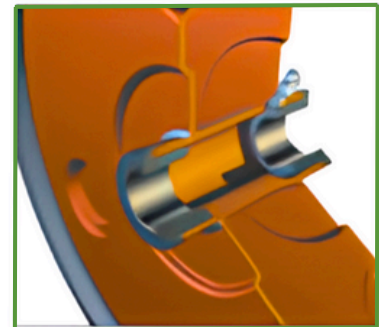


Hub HD type C2

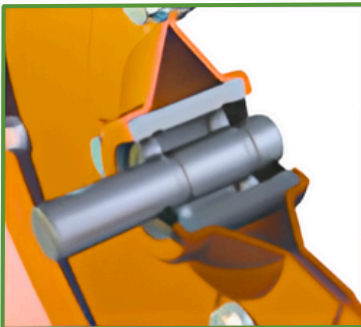

Monobloc two-row ball bearing with protruding axis



Two single-row ball bearings and protective cover

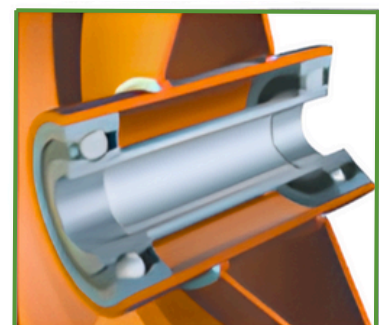

CONFIGURATION OF WHEELS



Designed for tough conditions



RIS configuration - OTISO patent



standard configuration



It is impossible to remove the tire from the disc



- Can be used at a large angle
- Enables the use of soft and, accordingly, self-cleaning tires (wheels)

RIS configuration (RIM INSIDE SYSTEM - disk system inside)

SELF-CLEANING EFFECT


ON 180° regardless of load.

There is no pressure inside, no risk of puncture

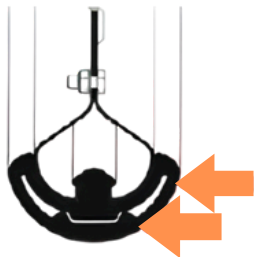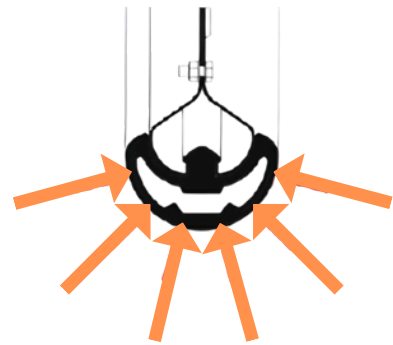

GREAT RESISTANCE TO SIDE LOADS.

The design of the disk inside the tire has excellent stability. The tire is locked between the discs

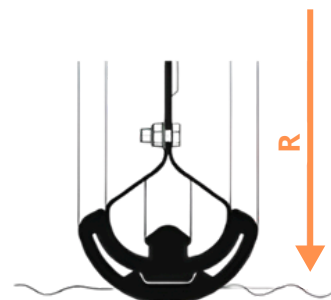

WHEELS OF LIMITATION



NS-A-001	Model: 400x114mm		
	Outer diameter: 400 Width: 114 Replacement bearing	5203KYY2 (PEER)	8.5 kg
NS-A-002	Model: 400x114mm		
	Outer diameter: 400 Width: 114 Replacement bearing	5203KYY2 (PEER)	8.4 kg
NS-A-003	Model: 400x115mm		
	Outer diameter: 400 Width: 115 Replacement bearing	5203KYY2 (PEER)	8.3 kg
NS-A-004	Model: 400x114mm		
	Outer diameter: 400 Width: 114	5203KYY2 (PEER)	5.9 kg

WHEELS OF LIMITATION DEPTHS







NS-A-005	Model: 400x114mm		5203KYY2 (PEER)	7.7 kg
	Outer diameter: 400 Width: 114			
NS-A-006	Model: 400x114mm		5203KYY2 (PEER)	9.3 kg
	Outer diameter: 400 Width: 114			
NS-A-007	Model: 400x114mm		5203KYY2 (PEER)	7.4 kg
	Outer diameter: 400 Width: 114			
NS-A-008	Model: 400x114mm		5203KYY2 (PEER)	8.1 kg
	Outer diameter: 400 Width: 114			
NS-A-009	Model: 400x62mm		5203KYY2 (PEER)	5.7 kg
	Outer diameter: 400 Width: 62			
NS-A-0010	Model: 400x80mm		5203KYY2 (PEER)	6.85 kg
	Outer diameter: 400 Width: 80 Variable bearing			

WHEELS OF LIMITATION DEPTHS

	Model: 400x62mm		
	Outer diameter: 400 Width: 114	5203KYY2 (PEER)	6 kg
	Model: 360x114mm		
			



WHEELS OF LIMITATION DEPTHS




NS-A-013	Model: 400x114mm		5203KYY2 (PEER)	9.5 kg
	Outer diameter: 400 Width: 114			
NS-A-014	Model: 400x114mm		5203KYY2 (PEER)	1.7 kg
	Outer diameter: 400 Width: 114			
NS-A-015	Model: 340x114mm		5203KYY2 (PEER)	6.2 kg
	Outer diameter: 340 Width: 114			
NS-A-0016	Model: 320x88mm		5203KYY2 (PEER)	4.4 kg
	Outer diameter: 320, Width: 88			
NS-A-017	Model: 340x80mm		5203KYY2 (PEER)	5.6 kg
	Outer diameter: 340 Width: 80			
NS-A-018	Model: 320x110mm		5203KYY2 (PEER)	5 kg
	Outer diameter: 320 Width: 110			

CLOSING WHEELS

NS-A-019	Model: 360x210mm		
	Outer diameter: 360 Width: 210	6004-2RS (PEER)	15 kg
NS-A-020	Model: 310x29mm		
	Outer diameter: 310 Width: 29	5203KYY2 (PEER)	1.7 kg
NS-A-021	Model: 300x29mm		
	Outer diameter: 300 Width: 29	5203KYY2 (PEER)	1.4 kg
NS-A-0022	Model: 330x50mm		
	Outer diameter: 330 Width: 50	5203KYY2 (PEER)	2.8 kg
NS-A-023	Model: 320x50mm		
	Outer diameter: 320 Width: 50	5203KYY2 (PEER)	2.5 kg
NS-A-024	Model: 330x50mm		
	Outer diameter: 330 Width: 50	5203KYY2 (PEER)	2.9 kg

CLOSING WHEELS



			
NS-A-026			
	Width: 45		
NS-A-027	Model: 300x29mm		
	Outer diameter: 300 Width: 29		1.27 kg

CLOSING WHEELS













NS-A-0028	Model: 300x29mm	5203KYY2 (PEER)	2.6 kg
	Outer diameter: 300 Width: 29		
NS-A-029	Model: 340x50mm	5203KYY2 (PEER)	
	Outer diameter: 340 Width: 50		
NS-A-030	Model: 350x80mm	5203KYY2 (PEER)	3.7 kg
	Outer diameter: 350 Width: 80		



CLOSING WHEELS

NS-A-031	Model: 330x45mm	5203KYY2 (PEER)	3.3 kg
	Outer diameter: 330 Width: 45		
NS-A-032	Model: 250x16mm	204PY3 (PEER)	
	Outer diameter: 250 Width: 16		
NS-A-033	Model: 340x50mm	203KRR2 (PEER)	
	Outer diameter: 340 Width: 50		
NS-A-0034	Model: 210x25mm	6204 (PEER)	
	Outer diameter: 210 Width: 25		
NS-A-035	Model: 210x80mm		
	Outer diameter: 210 Width: 80		
NS-A-036	Model: 182x100mm		
	Outer diameter: 182 Width: 100		

CLOSING WHEELS

Cross section	Tire model	Cross section	Tire model
	Wheel limitation depth 400h115		Wheel for limitation depth 400h114
	Wheel limitation depth of oblique problem 340h50		Wide nylon wheel for limitation depth 400h114
	Narrow wheel limitation depth 400h80		V-undereh wide wheel 400h114
	Wheel closing 330h50		Wheel closing
	Wheel limitation depth 400h60		Wheel closing 310h29
	Narrow wheel limitation depth 400h60		Wheel limitation depth 330h50

ABOUT US

"We are **AGRO CAR**" -this is the main motto of our family company that was created September 9, 2009

- We have a main store and service center in Kropyvnytskyi, and a branch in Vinnytsia
- The area of our service and production center is 2600 m²
- More than 4000 SCU products in stock
- The customer base of AGRO KAR includes more than 1,500 regular customers with whom the company has been working stably for more than 5 years.

There is AGRO CAR **official dealer** MAYER PRO, BOGUSLAV and PRECISION PLANTING in Ukraine and importer of such brands as: John Deere, Wil Rich, Case, Kinze, Vaderstadt, Great Plains, Gaspardo, etc. and **does not plan to stop there.**

GASPARDO

VÄDERSTAD

Kverneland

MAYER PRO

Precision
Planting

BOGUSLAV

Great Plains
"Harvest Starts Here."

WR

JOHN DEERE

HORSCH

KINZE

CASE
AGRICULTURE

Yetter
FARM EQUIPMENT

JCB

 AgroKar

YouTube



Instagram



"Agro Kar" LLC

agrokaragent@gmail.com

25014, Kropyvnytskyi, a/s-106, LLC "Agro Kar"

Kropyvnytskyi, str. The first

Exhibition 10 (Murmanska)

+ 38 (067) 634 23 43

+ 38 (098) 355 03 59

Vinnytsia, Nemyrivske highway 90G

+ 38 (067) 522 52 42

+ 38 (067) 120 27 20

www.agrokar.com.ua